


Three-Phase Transformer Pads

PRODUCT FEATURES

- Step design built into side-wall around the perimeter provides resistance against deflection in buried position.
- Constructed of fire-retardant materials. Combination of chopped glass spray-up and hand lay-up of woven roving glass reinforcement.
- External ribs are molded into all sides for greater side-wall and vertical strength.
- Heavy-duty reinforced fiberglass construction, stress areas strengthened with nonhygroscopic laminated reinforcing materials.
- Smooth exterior surface for tamper resistance.
- For added strength and rigidity the top is heavily reinforced.
- Exterior color: Munsell #7GY3.29/1.5 Green.
- Gel-coated exterior for superior protection against UV radiation and corrosion resistance.

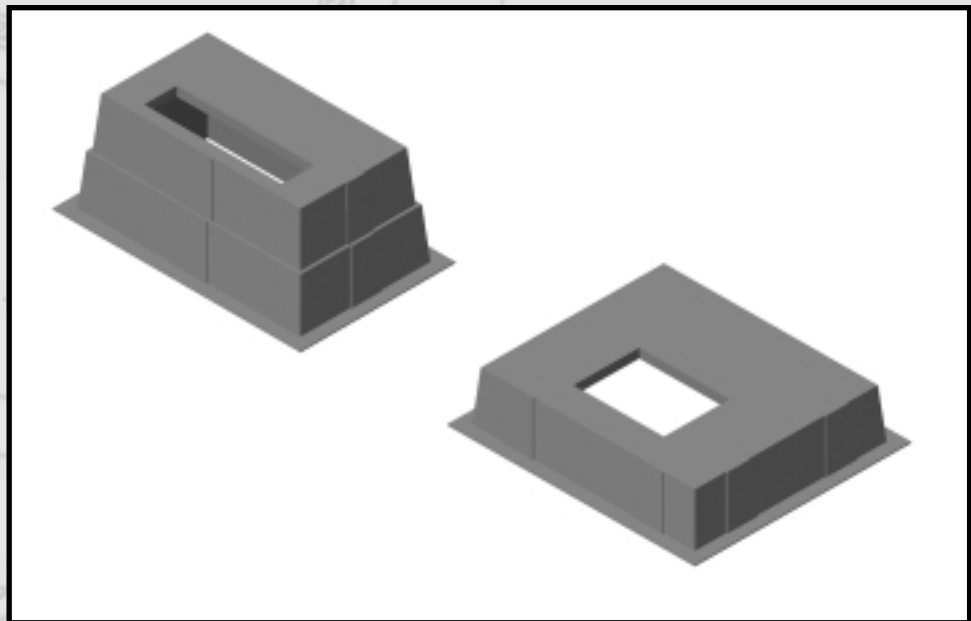

	A	B	C	D x E = TOP
Model Number:	Length	Width	Height	Openings
HL-47 P	74	70	4 3/4	41 x 13
FSG 72-66-05 GHRT	72	66	5	42 x 18
FSG 60-48-10 QNRT	60	48	10	42 x 18
FSG 42-42-15 BNRT	42	42	15	24 x 14
FSG 72-72-15 SNRT	72	72	15	48 x 18
FSG 56-56-20 BURT	56	56	20	42 x 16
FSG 56-56-20 EMRT	56	56	20	48 x 18
FSG 72-58-32 SYRT	72	58	32	51 x 18
FSG 72-58-32 TDRT	72	58	32	56 x 16
FSG 72-58-32 UYRT	72	58	32	58 x 18
FSG 55-44-36 RONT	55	44	36	44 x 20
FSG 69-48-36 EMRT	65	48	36	48 x 18
FSG 69-48-36 DBRT	65	48	36	50 x 20
FSG 65-56-36 TFRT	65	56	36	56 x 20
FSG 69-48-36 GWRT	65	48	36	57 x 18
FSG 67-59-36 TFRT	67	59	36	56 x 20
FSG 69-48-36 CART	69	48	36	58 x 16
FSG 69-65-36 EMRT	69	65	36	48 x 18
FSG 69-65-36 GWRT	69	65	36	57 x 18
FSG 70-64-36 EMRT	70	64	36	48 x 18
FSG 72-61-36 CFRT	72	61	36	60 x 12
FSG 74-56-36 CDRT	74	56	36	64 x 16
FSG 75-60-36 UYRT	75	60	36	58 x 18
FSG 75-72-36 GWRT	75	72	36	57 x 18
FSG 76-75-36 GWRT	76	75	36	57 x 18
FSG 79-66-36 CERT	79	66	36	67 x 16
FSG 80-54-36 TERT	80	54	36	56 x 18

Contact Highline for custom sizes.

